




FIELD ASSEMBLY CONNECTOR

CAIMAN

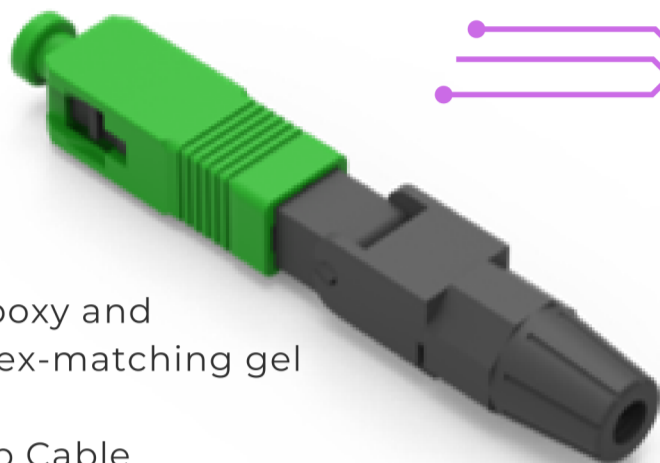

PRODUCT DESCRIPTION

- ◆ Factory-installed fiber stub, no epoxy and polishing required, inside with index-matching gel
- ◆ Product Length: 60mm
- ◆ Cable: 3.0*2.0mm, 2.0*1.6mm Drop Cable
- ◆ Fiber: G657A1, G657A2, G657B3, Fiber Diameter 125 μ m, Coating Diameter 250 μ m
- ◆ Operating Temperature: -10 $^{\circ}$ C~+60 $^{\circ}$ C
- ◆ Application: FTTH

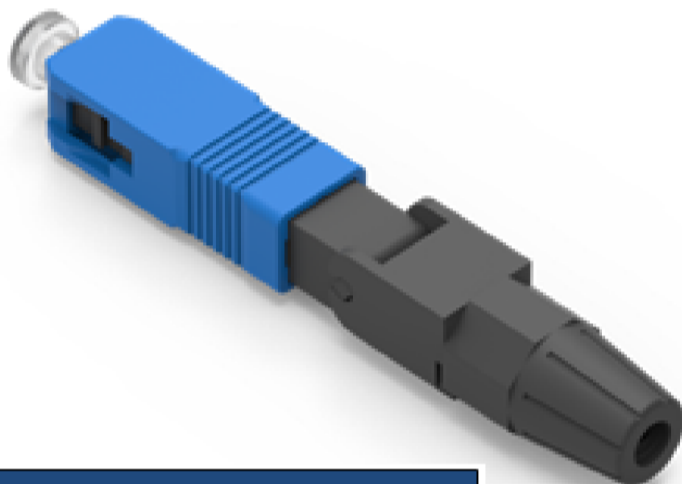

PERFORMANCE

Performance			
Item	Parameter	Item	Parameter
Insert Loss	AVG \leq 0.3dB, MAX \leq 0.5dB	Return Loss	SM: UPC \geq 45dB, APC \geq 50dB
Tensile Strength	\geq 30N	Mechanical Endurance	500 Times
Repeat Assembly	\geq 3 Times	Assembly Time	\leq 2mins